




! Pin screw for additional locking of the fiber ferrule:  
 - before pulling the FC-PC-connector:  
 unlock the pin screw.  
 -before inserting the FC-PC-connector:  
 make sure the ferrule is not blocked  
 by the pin screw !  
 ( using screw-driver size 1.2mm 9D-12 ① )

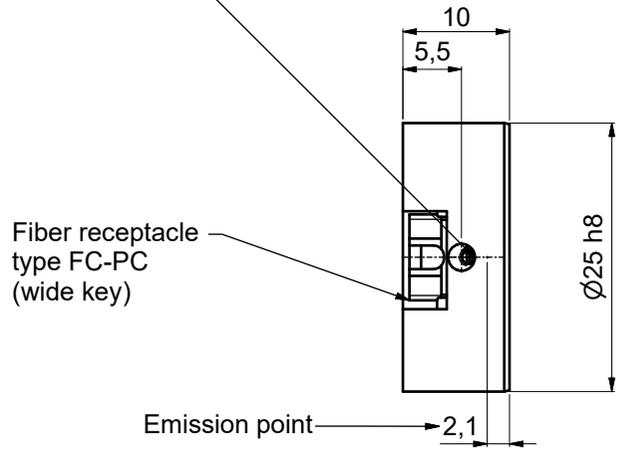

Tools for assembly and adjustment

screw driver  
size 1.2mm  
9D-12

①



For information only  
 Not for manufacturing purposes

Dimensions DIN EN ISO 14405		Scale: 2:1			
		Date		Name	
		08.04.2020		A. Trapp	
		editor			
		exam.			
		free			
				25AF-0-FC	
				FC- PC-Adapter / AM25	
				25AF-0-FC	
				Customer Drawing	
				9709-2052-0625	
				Schäfter+Kirchhoff OPTICS, METROLOGY, AND PHOTONICS	
				Size: A3 Page: 1	
File: 970920520625.idw				Model: 970920520625.iam	