

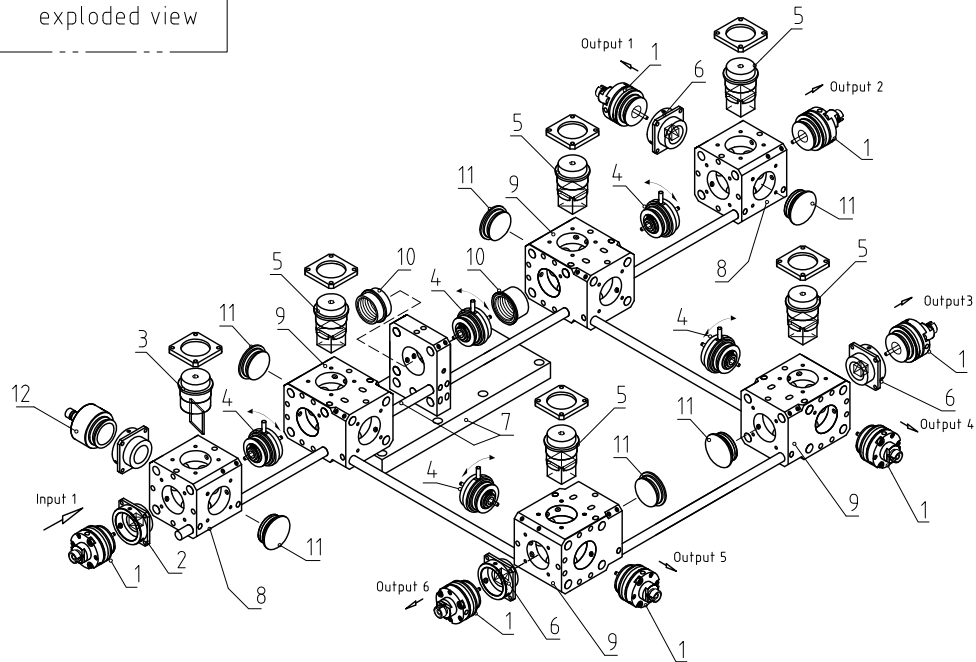


exploded view

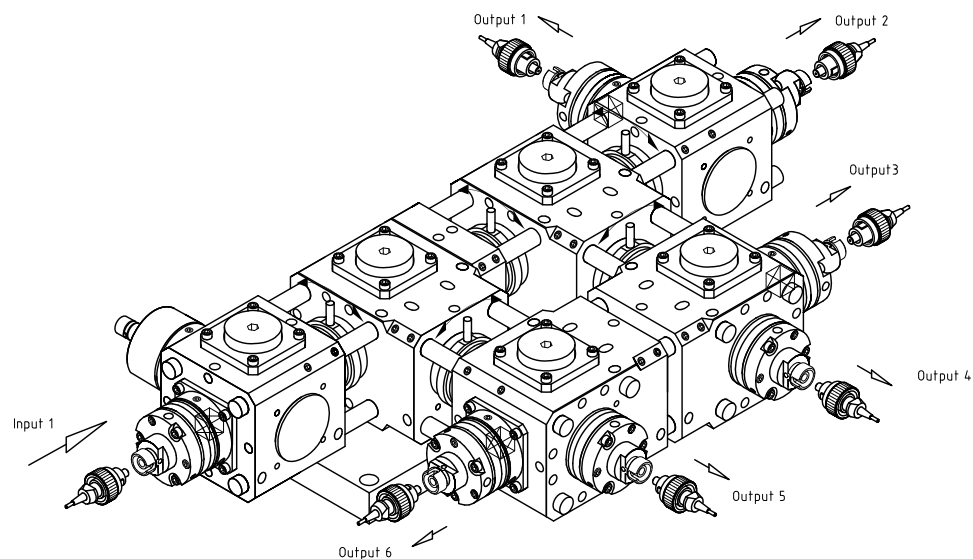

optical scheme

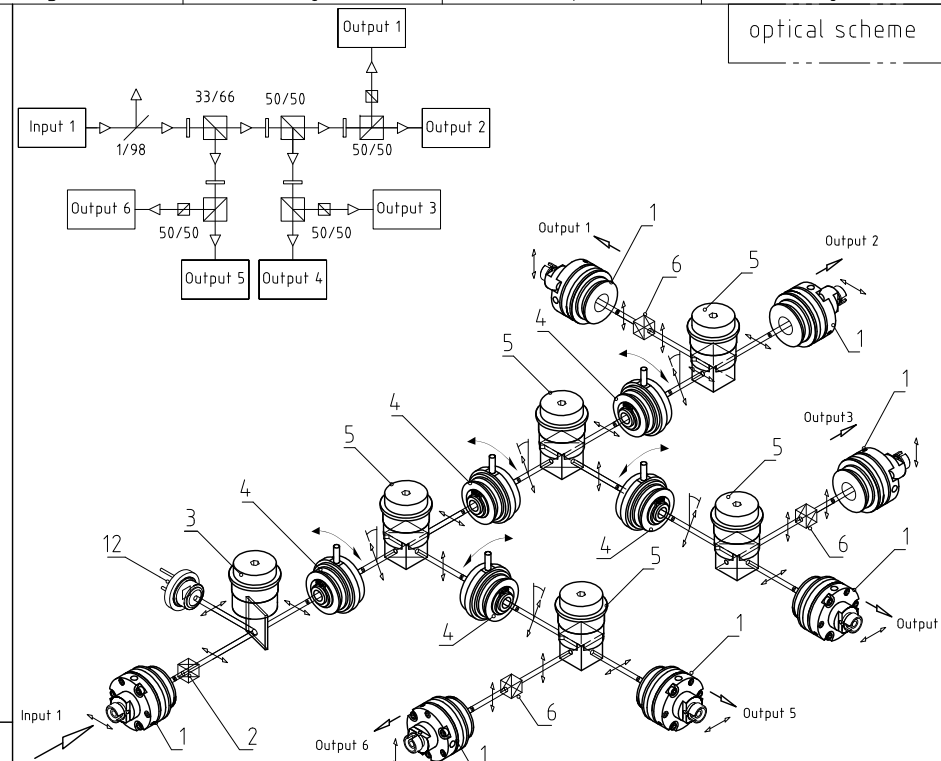

- 7 x pos. 1: 60SMS-1-4-Xxx-xx
Laser Beam Coupler
- 1 x pos. 2: 48PM-SE1
Polarizer (small) in off axis adj. mount
- 1 x pos. 3: 48BS
Beam splitter 99:1
- 5 x pos. 4: 48WP
Retarding optics lambda/2
- 5 x pos. 5: 48PM
Polarization beam splitter in adjustment mount
- 3 x pos. 6: 48PM-S
Polarizer (small) in adj. mount
- 1 x pos. 7: 48MB19,5-150
Console
- 2 x pos. 8: 48MC-SM-19,5
Combination cube
- 4 x pos. 9: 48MC-LTS-19,5
Combination cube
- 2 x pos. 10: 48S-19,5
Spacer
- 12 x pos. 11: 48C-19,5
Cap
- 1 x pos. 12: 48PD-65
Photo diode for monitoring
- 1 x pos. 15: MON
System assembly and pre-adjustment

				DIN 7168		Oberfläche	Maßstab 1:2	Position	Menge
				fein	mittel				
				Datum		Name	fiber port cluster 1 to 6		
				Bearb. 17.01.2006					
				Gepr.					
				Norm					
				Schäfter&Kirchhoff			9801-2909-0416		Blatt 1/1
				OPTO-SENSORIK UND MESSTECHNIK					Bl
				OPTIK-ENTWICKLUNG ELEKTRONIK-SENSORTECHNIK SOFTWARE					17.01.2006
Zust.	Änderung	Datum	Name	EDV Nr. 980129090416					